
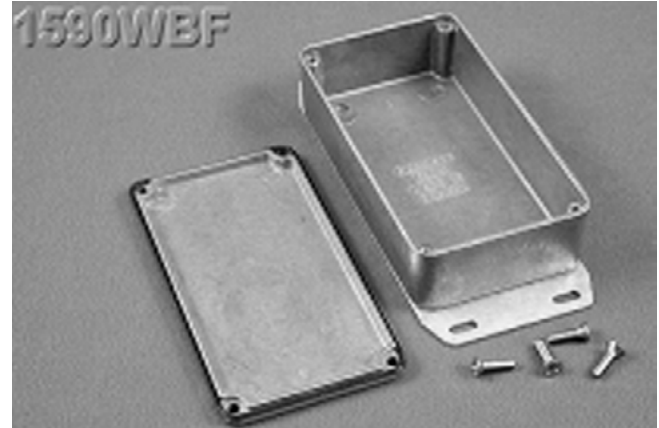


Hammond Watertight Diecast Aluminium Boxes - Flanged Base — 1590W “FL” Series

Rugged, diecast aluminium alloy . Tough yet easy to machine. Meets IP65.

- Lap joint construction with a factory poured of silicone rubber around the perimeter provides protection against dust & splashing water. Silicone gasket remains flexible from -62 to +232°C.
- Painted version is painted with tough polyester powder paint for lasting finish.
- Assembled with 6-32 x 1/2” stainless steel colour matched machine screws & ‘O’ rings.
- Bottom flange is an aluminum plate, welded onto the base of the enclosure.
- Lid screws are exposed for easy access once mounted.

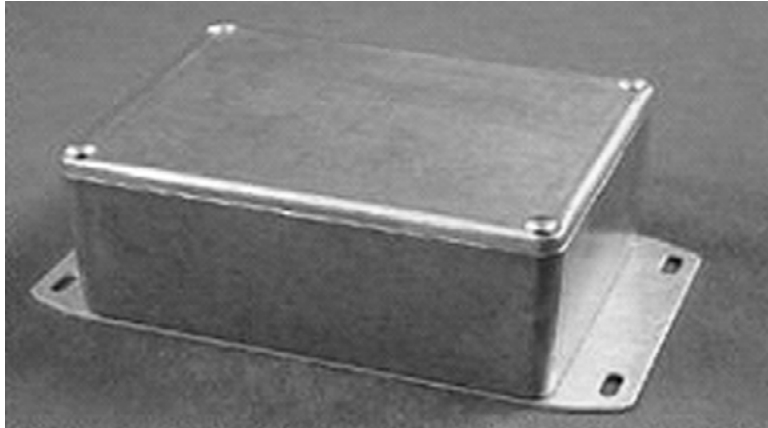

Approx Draft = 1°15' to 2°

For detailed drawings and CAD files visit ww.hammondmfg.com

Part Number		Length	Width	Height (no lid)	Height With Lid
Unpainted	Black				
26-1590WLLBF	26-1590WLLBFBK	50	50	21	25
26-1590WLBF	26-1590WLBFBK	51	51	27	31
26-1590WHF	26-1590WHFBK	52.5	38	27	31
26-1590WYF	26-1590WYFBK	92	92	38	42
26-1590WAF	26-1590WAFBK	93	39	27	31
26-1590WGF	26-1590WGFBK	100	50	21	25
26-1590WSF	26-1590WSFBK	111	82	40	44
26-1590WBF	26-1590WBFBK	112	60	27	31
26-1590WBBF	26-1590WBBFBK	119	94	30	34
26-1590WQF	26-1590WQFBK	120	120	28	32
26-1590WUF	26-1590WUFBK	120	120	55	59
26-1590WVF	26-1590WVFBK	120	120	90	94
26-1590WCF	26-1590WCFBK	120	94	53	56.5
26-1590WTF	26-1590WTFBK	121	80	55	59
26-1590WN1F	26-1590WN1FBK	121.1	66	35.3	39.3
26-1590WKKF	26-1590WKKFBK	125	125	53	57
26-1590WKF	26-1590WKFBK	125	125	75	79
26-1590WJF	26-1590WJFBK	145	95	45	49
26-1590WP1F	26-1590WP1FBK	153	82	46	50
26-1590WDDF	26-1590WDDFBK	188	119.5	33	37
26-1590WDF	26-1590WDFBK	188	120	52	56
26-1590WEF	26-1590WEFBK	188	120	78	82
26-1590WFF	26-1590WFFBK	188	188	63	67
26-1590WR1F	26-1590WR1FBK	192	111	57	61